

HD+ 90 VV


Tandem roller with two vibrating roller drums
Tandem rollers Series HD+ / Series H258









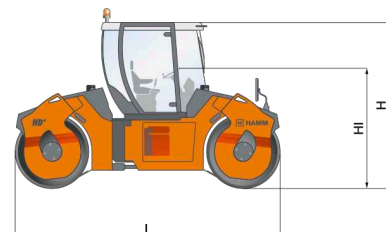

HIGHLIGHTS HD+

- > 3-point articulation for even weight distribution and excellent on-centre feel
- > Simple, intuitive and language-neutral operation
- > Excellent view of the machine and the construction site
- > Seat operating unit can be moved and rotated
- > Track offset for comfortable start up, moving away and compacting at curb edges

Machine dimensions		
Total length (L)	mm	4600
Width (B)	mm	1800
Total height (H)	mm	3050
Drum width (X)	mm	1680/1680
Height loading, min. (Hl)	mm	2185



TECHNICAL DATA		Unit	HD+ 90 VV
	Weights		
	Operating weight with cab	kg	9655
	Operating weight with ROPS	kg	9495
	Operating weight, max.	kg	10350
	Static linear load, front/rear	kg/cm	28,5/29,0
	Machine dimensions		
	Total length	mm	4600
	Total height with cab	mm	3050
	Height loading, min.	mm	2185
	Wheel base	mm	3400
	Total width with cab	mm	1800
	Max. working width	mm	1850
	Kerb clearance, left/right	mm	790/790
	Turning radius, inside	mm	5250
	Drum dimensions		
	Drum width, front/rear	mm	1680/1680
	Drum diameter, front/rear	mm	1200/1200
	Drum thickness, front/rear	mm	17/17
	Drum type, front		smooth/non-divided
	Drum type, rear		smooth/non-divided
	Track offset, left/right	mm	170
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 2012 L04 2V
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		100,0/136,0/2300
	Power rating SAE J1349, kW/HP/rpm		100,0/134,0/2300
	Emission standard		EU Stage IIIA / EPA Tier 3
	Drive		
	Speed, working gear	km/h	0-6,0
	Speed, transportation gear	km/h	0-12,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	35/40
	Vibration		
	Vibration frequency, front, I/II	Hz	42/50
	Vibration frequency, rear, I/II	Hz	42/50
	Amplitude, front, I/II	mm	0,62/0,34
	Amplitude, rear, I/II	mm	0,62/0,34
	Centrifugal force, front, I/II	kN	75/60
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	150
	Sound level		
	Acoustic power LW(A), sticker		108
	Acoustic power LW(A), measured		107

EQUIPMENT

2 water pumps, Foldable scraper, Dashboard with displays, indicator lights and switches, Tilttable dashboard, Battery isolation switch, Spring-mounted driver's seat with armrests and safety belt, Hammtronic - electronic machine management, Seat-operating unit, can be moved and rotated laterally, Track offset, Vibration parameters, adjustable individually and vibration front, rear, Spray system with spray bars front and rear, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain

OPTIONAL EQUIPMENT

ROPS cabin with split doors, ROPS, rigid, Air conditioning, Steering column with comfort exit and tilttable dashboard, Safety belt monitoring device, Additional drive lever, left, Radio, HCQ Navigator, Protective roof, Version with additional fuel prefilter, HAMM Compaction Meter (HCM), HAMM Temperature Meter (HTM), Track offset display, , Telematics interface, Rotating beacon, Drum edge lighting, Edge pressing and cutting equipment

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

